


Augenschrauben DIN 444, Form A + B / LA + LB

Werkstoff: nach DIN, Edelstahl A 2 + A 4
 Ausführung: roh, galv. verzinkt

Eye Bolts DIN 444, Form A + B / LA + LB

Material: according to DIN,
 Stainless Steel A 2 + A 4
 Type: self coloured, galvanized

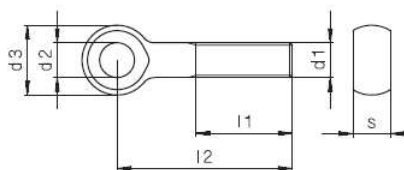

Artikel-Nr. Article-No.	Gewinde (d1) Thread (d1)	d2	d3	l1	l2	s		Gewicht kg/ 100 Stck. Weight kg/100 pieces
						A	B	
032330	M 5	5	12	15	30	8	6	1
032335	M 5	5	12	15	35	8	6	1
032340	M 5	5	12	15	40	8	6	1
032345	M 5	5	12	15	45	8	6	1
032350	M 5	5	12	15	50	8	6	1
032355	M 5	5	12	15	55	8	6	1
032360	M 5	5	12	15	60	8	6	1
032365	M 5	5	12	15	65	8	6	1
032370	M 5	5	12	15	70	8	6	1
032375	M 5	5	12	15	75	8	6	1
032380	M 5	5	12	15	80	8	6	1
033430	M 6	6	14	18	30	9	7	2
033435	M 6	6	14	18	35	9	7	2
033440	M 6	6	14	18	40	9	7	2
033445	M 6	6	14	18	45	9	7	2
033450	M 6	6	14	18	50	9	7	2
033455	M 6	6	14	18	55	9	7	2
033460	M 6	6	14	18	60	9	7	2
033465	M 6	6	14	18	65	9	7	2
033470	M 6	6	14	18	70	9	7	2
033475	M 6	6	14	18	75	9	7	2
033480	M 6	6	14	18	80	9	7	2
033490	M 6	6	14	18	90	9	7	2
034100	M 6	6	14	18	90	9	7	2
034540	M 8	8	18	22	40	11	9	3
034545	M 8	8	18	22	45	11	9	3
034550	M 8	8	18	22	50	11	9	3
034555	M 8	8	18	22	55	11	9	3
034560	M 8	8	18	22	60	11	9	3
034565	M 8	8	18	22	65	11	9	4
034570	M 8	8	18	22	70	11	9	4
034575	M 8	8	18	22	75	11	9	5
034580	M 8	8	18	22	80	11	9	5
034590	M 8	8	18	22	90	11	9	5
0345100	M 8	8	18	22	100	11	9	6

Maße in mm

Dimensions in mm

Zwischenabmessungen und Sondergewinde auf Anfrage!

Intermediate sizes and special threads are available on request!

Augenschrauben DIN 444, Form A + B / LA + LB

Fortsetzung

Eye Bolts DIN 444, Form A + B / LA + LB

Continuation

Artikel-Nr. Article-No.	Gewinde (d1) Thread (d1)	d2	d3	l1	l2	s		Gewicht kg/ 100 Stck. Weight kg/100 pieces
						A	B	
0345120	M 8	8	18	22	120	11	9	6
0345130	M 8	8	18	22	130	11	9	6
0345140	M 8	8	18	22	140	11	9	6
036040	M 10	10	20	25	40	14	12	4
036045	M 10	10	20	25	45	14	12	5
036050	M 10	10	20	25	50	14	12	5
036055	M 10	10	20	25	55	14	12	5
036060	M 10	10	20	25	60	14	12	6
036065	M 10	10	20	25	65	14	12	6
036070	M 10	10	20	25	70	14	12	6
036075	M 10	10	20	25	75	14	12	7
036080	M 10	10	20	25	80	14	12	8
036090	M 10	10	20	25	90	14	12	8
0360100	M 10	10	20	25	100	14	12	9
0360110	M 10	10	20	25	110	14	12	10
0360120	M 10	10	20	25	120	14	12	10
0360130	M 10	10	20	25	130	14	12	10
0360140	M 10	10	20	25	140	14	12	10
0360150	M 10	10	20	25	150	14	12	11
037540	M 12	12	25	30	40	17	14	7
037550	M 12	12	25	30	50	17	14	7
037555	M 12	12	25	30	55	17	14	8
037560	M 12	12	25	30	60	17	14	8
037565	M 12	12	25	30	65	17	14	9
037570	M 12	12	25	30	70	17	14	9
037575	M 12	12	25	30	75	17	14	9
037580	M 12	12	25	30	80	17	14	9
037590	M 12	12	25	30	90	17	14	10
0375100	M 12	12	25	30	100	17	14	11
0375110	M 12	12	25	30	110	17	14	11
0375120	M 12	12	25	30	120	17	14	12
0375130	M 12	12	25	30	130	17	14	13
0375140	M 12	12	25	30	140	17	14	14
0375150	M 12	12	25	30	150	17	14	15
0375160	M 12	12	25	30	160	17	14	16
0375180	M 12	12	25	30	180	17	14	18
0375200	M 12	12	25	30	200	17	14	20
0375220	M 12	12	25	30	220	17	14	21
0375240	M 12	12	25	30	240	17	14	23
0375260	M 12	12	25	30	260	17	14	25
039440	M 16	16	32	38	40	19	17	13

Maße in mm

Dimensions in mm

Zwischenabmessungen und Sondergewinde auf Anfrage!

Intermediate sizes and special threads are available on request!

Augenschrauben DIN 444, Form A + B / LA + LB

Fortsetzung

Eye Bolts DIN 444, Form A + B / LA + LB

Continuation

Artikel-Nr. Article-No.	Gewinde (d1) Thread (d1)	d2	d3	l1	l2	s		Gewicht kg/ 100 Stck. Weight kg/100 pieces
039445	M 16	16	32	38	45	19	17	14
039450	M 16	16	32	38	50	19	17	14
039455	M 16	16	32	38	55	19	17	15
039465	M 16	16	32	38	65	19	17	15
039470	M 16	16	32	38	70	19	17	15
039475	M 16	16	32	38	75	19	17	16
039480	M 16	16	32	38	80	19	17	16
039490	M 16	16	32	38	90	19	17	18
0394100	M 16	16	32	38	100	19	17	20
0394110	M 16	16	32	38	110	19	17	21
0394120	M 16	16	32	38	120	19	17	23
0394130	M 16	16	32	38	130	19	17	24
0394140	M 16	16	32	38	140	19	17	26
0394150	M 16	16	32	38	150	19	17	28
0394160	M 16	16	32	38	160	19	17	29
0394180	M 16	16	32	38	180	19	17	32
0394200	M 16	16	32	38	200	19	17	35
0394220	M 16	16	32	38	220	19	17	38
0394240	M 16	16	32	38	240	19	17	41
0394260	M 16	16	32	38	260	19	17	45
0410080	M 20	18	40	46	80	24	22	32
0410090	M 20	18	40	46	90	24	22	32
0410100	M 20	18	40	46	100	24	22	33
0410110	M 20	18	40	46	110	24	22	36
0410120	M 20	18	40	46	120	24	22	38
0410130	M 20	18	40	46	130	24	22	41
0410140	M 20	18	40	46	140	24	22	43
0410150	M 20	18	40	46	150	24	22	46
0410160	M 20	18	40	46	160	24	22	48
0410180	M 20	18	40	46	180	24	22	53
0410200	M 20	18	40	46	200	24	22	58
0410220	M 20	18	40	46	220	24	22	62
0410240	M 20	18	40	46	240	24	22	67
0410260	M 20	18	40	46	260	24	22	72
0422090	M 24	22	45	54	90	28	25	44
0422100	M 24	22	45	54	100	28	25	45
0422110	M 24	22	45	54	110	28	25	49
0422120	M 24	22	45	54	120	28	25	52
0422130	M 24	22	45	54	130	28	25	56
0422140	M 24	22	45	54	140	28	25	60
0422150	M 24	22	45	54	150	28	25	63

Maße in mm

Dimensions in mm

Zwischenabmessungen und Sondergewinde auf Anfrage!

Intermediate sizes and special threads are available on request!

Augenschrauben DIN 444, Form A + B / LA + LB

Fortsetzung

Eye Bolts DIN 444, Form A + B / LA + LB

Continuation

Artikel-Nr. Article-No.	Gewinde (d1) Thread (d1)	d2	d3	l1	l2	s		Gewicht kg/ 100 Stck. Weight kg/100 pieces
0422160	M 24	22	45	54	160	28	25	67
0422180	M 24	22	45	54	180	28	25	74
0422200	M 24	22	45	54	200	28	25	81
0422220	M 24	22	45	54	220	28	25	87
0422240	M 24	22	45	54	240	28	25	94
0422260	M 24	22	45	54	260	28	25	101
0422280	M 24	22	45	54	280	28	25	110
0434110	M 30	28	55	65	110	34	30	97
0434140	M 30	28	55	65	140	34	30	98
0434150	M 30	28	55	65	150	34	30	99
0434160	M 30	28	55	65	160	34	30	105
0434180	M 30	28	55	65	180	34	30	116
0434200	M 30	28	55	65	200	34	30	127
0434220	M 30	28	55	65	220	34	30	137
0434240	M 30	28	55	65	240	34	30	148
0434260	M 30	28	55	65	260	34	30	159
0434280	M 30	28	55	65	280	34	30	170
0434300	M 30	28	55	65	300	34	30	181
0441160	M 36	32	65	78	160	41	38	157
0441180	M 36	32	65	78	180	41	38	173
0441200	M 36	32	65	78	200	41	38	189
0441220	M 36	32	65	78	220	41	38	205
0441240	M 36	32	65	78	240	41	38	220
0441260	M 36	32	65	78	260	41	38	235
0441280	M 36	32	65	78	280	41	38	250
0441300	M 36	32	65	78	300	41	38	265

Maße in mm

Dimensions in mm

Zwischenabmessungen und Sondergewinde auf Anfrage!

Intermediate sizes and special threads are available on request!