

Steinschrauben DIN 529, Form C


Werkstoff: nach DIN

Ausführung: roh, galv. verzinkt

Stone Bolts DIN 529, Form C

Material: according to DIN

Type: self coloured, galvanized

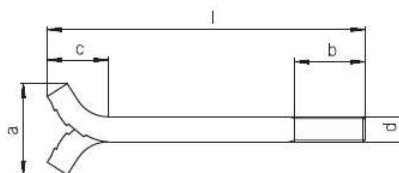

| Artikel-Nr. Article-No. | Gewinde (d) Thread (d) | a | b | c | l | Gewicht kg/ 100 Stck. Weight kg/100 pieces |
|----------------------------|-------------------------------|----|----|-----|------|---|
| 0614125 | M 12 | 40 | 30 | 70 | 125 | 9 |
| 0614150 | M 12 | 40 | 30 | 70 | 150 | 10 |
| 0614160 | M 12 | 40 | 30 | 70 | 160 | 11 |
| 0614200 | M 12 | 40 | 30 | 70 | 200 | 14 |
| 0614250 | M 12 | 40 | 30 | 70 | 250 | 17 |
| 0614300 | M 12 | 40 | 30 | 70 | 300 | 19 |
| 0614320 | M 12 | 40 | 30 | 70 | 320 | 22 |
| 0615160 | M 16 | 55 | 40 | 90 | 160 | 20 |
| 0615200 | M 16 | 55 | 40 | 90 | 200 | 26 |
| 0615250 | M 16 | 55 | 40 | 90 | 250 | 32 |
| 0615280 | M 16 | 55 | 40 | 90 | 280 | 35 |
| 0615300 | M 16 | 55 | 40 | 90 | 300 | 38 |
| 0615320 | M 16 | 55 | 40 | 90 | 320 | 41 |
| 0615350 | M 16 | 55 | 40 | 90 | 350 | 44 |
| 0615400 | M 16 | 55 | 40 | 90 | 400 | 51 |
| 0615500 | M 16 | 55 | 40 | 90 | 500 | 64 |
| 0615600 | M 16 | 55 | 40 | 90 | 600 | 68 |
| 0616200 | M 20 | 65 | 50 | 110 | 200 | 39 |
| 0616250 | M 20 | 65 | 50 | 110 | 250 | 49 |
| 0616300 | M 20 | 65 | 50 | 110 | 300 | 55 |
| 0616320 | M 20 | 65 | 50 | 110 | 320 | 63 |
| 0616400 | M 20 | 65 | 50 | 110 | 400 | 78 |
| 0616500 | M 20 | 65 | 50 | 110 | 500 | 98 |
| 061663 | M 20 | 65 | 50 | 110 | 630 | 123 |
| 0617250 | M 24 | 80 | 60 | 130 | 250 | 74 |
| 0617260 | M 24 | 80 | 60 | 130 | 260 | 78 |
| 0617300 | M 24 | 80 | 60 | 130 | 300 | 85 |
| 0617320 | M 24 | 80 | 60 | 130 | 320 | 95 |
| 0617400 | M 24 | 80 | 60 | 130 | 400 | 119 |
| 0617500 | M 24 | 80 | 60 | 130 | 500 | 149 |
| 0617630 | M 24 | 80 | 60 | 130 | 630 | 188 |
| 0617800 | M 24 | 80 | 60 | 130 | 800 | 238 |
| 06171000 | M 24 | 80 | 60 | 130 | 1000 | 298 |
| 06171250 | M 24 | 80 | 60 | 130 | 1250 | 372 |

Maße in mm

Dimensions in mm

Zwischenabmessungen auf Anfrage!

Intermediate Sizes are available on request!